


SINGLE CARTRIDGE FILTER HOUSINGS

QFP1X SERIES

QFP1X Series housings are designed for demanding industrial and commercial applications. Heavy duty 316L stainless steel construction provides maximum durability and corrosion resistance. Ring nut closure allows for easy access and quick cartridge change outs. Available in 10, 20 and 30" lengths with flow rates up to 21 GPM to best fit your application requirements.

Features:

- Designed for industrial and commercial applications
- Heavy duty cast head with mounting bracket
- Constructed of corrosion resistant 316L Stainless Steel
- 300 PSI @ 200 F pressure rating
- Ring nut closure for easy cartridge change out (wrench included)
- Spring loaded knife edge bottom cup provides a positive seal
- Buna O-Ring seal
- 1/8" bottom drain with plug
- For use with double open end filter cartridges
- Maximum cartridge diameter 2.75"
- Made in the USA

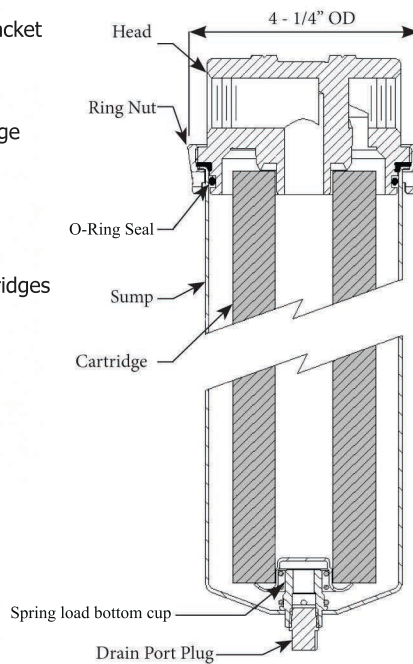

Model Selection

Model Number	Material	Cartridge Type	Cartridge Length	Inlet/Outlet	GPM Depth Cartridge	GPM Pleated Cartridge
QFP1X10-3/4	316L SS	DOE	9.75" - 10"	3/4" FNPT	5	7
QFP1X20-3/4	316L SS	DOE	19.5" - 20"	3/4" FNPT	10	14
QFP1X20-1.0	316L SS	DOE	19.5" - 20"	1.0" FNPT	10	14
QFP1X30-1.0	316L SS	DOE	29.5" - 30"	1.0" FNPT	15	21

*Flow rates are for guidelines only. Actual flow rates vary based on micron rating, cartridge type, solids loading and other factors



Quantrol Inc. 9001 Hanslik Court, Naperville, IL 60564
 Phone: (630) 355-3330 Fax: (630) 355-3568 www.quantrol.net