


# MULTI-CARTRIDGE BAND-CLAMP FILTER HOUSINGS

## GTCHB Series Band Clamp Filter Housings

are designed for Commercial and Industrial liquid filtration applications. These multi-cartridge filter housings are available in 4, 5, 7, 12 or 22 round configurations for flow rates up to 660 GPM. Housings are available in your choice of 304 or 316 poly-coated stainless steel. Universal seal cups and compression plates allow for use of DOE, 222/Flat or 222/Fin style cartridges.

### Features:

- Heavy Duty 304 or 316 Stainless Steel Construction
- External Poly-Coat Finish
- Easy Access Band Clamp Closure
- Welded on Mounting/Support Legs
- Gauge/Drain & Vent Ports Standard
- Accepts DOE, 222/Flat or 222/Fin Style Cartridges
- Adjustable Top Plate with spring seal assemblies
- Buna O-Ring
- 150 PSI Maximum Pressure
- 250° F Max Temperature

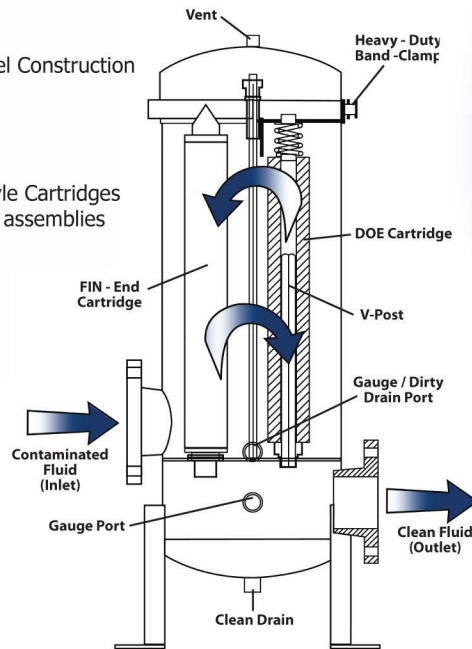

304SS Part #	316SS Part #	# of Cartridges	Cartridge Length	In/Out	GPM - Depth Cartridge	GPM - Pleated Cartridge
GTCHB412M2415PC	GTCHB412M2615PC	4	10"	2" MNPT	20	30
GTCHB422M2415PC	GTCHB422M2615PC	4	20"	2" MNPT	40	60
GTCHB432M2415PC	GTCHB432M2615PC	4	30"	2" MNPT	60	90
GTCHB442M2415PC	GTCHB442M2615PC	4	40"	2" MNPT	80	120
GTCHB512M2415PC	GTCHB512M2615PC	5	10"	2" MNPT	25	38
GTCHB522M2415PC	GTCHB522M2615PC	5	20"	2" MNPT	50	75
GTCHB532M2415PC	GTCHB532M2615PC	5	30"	2" MNPT	75	115
GTCHB542M2415PC	GTCHB542M2615PC	5	40"	2" MNPT	100	150
GTCHB732M2415PC	GTCHB732M2615PC	7	30"	2" MNPT	105	150
GTCHB742M2415PC	GTCHB742M2615PC	7	40"	2" MNPT	140	200
GTCHB1233F2415PC	GTCHB1233F2615PC	12	30"	3" Flange	180	270
GTCHB1243F2415PC	GTCHB1243F2615PC	12	40"	3" Flange	240	360
GTCHB2234F2415PC	GTCHB2234F2615PC	22	30"	4" Flange	330	500
GTCHB2244F2415PC	GTCHB2244F2615PC	22	40"	4" Flange	440	660

\* Flow rates are for guidelines only. Actual flow rates vary based on micron rating, cartridge type, solids loading and other factors.



Quantrol Inc. 9001 Hanslik Court, Naperville, IL 60564  
 Phone: (630) 355-3330 Fax: (630) 355-3568 www.quantrol.net